

SFB1-T Socket




SFB2-T Socket


Wiring diagram SFB1-T




Wiring diagram SFB2-T



Dimensions SFB1-T

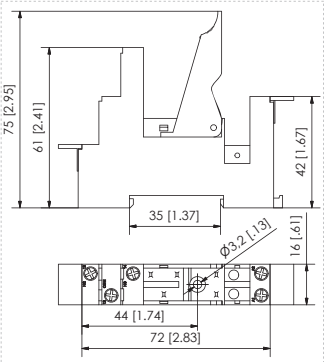

Dimensions SFB2-T

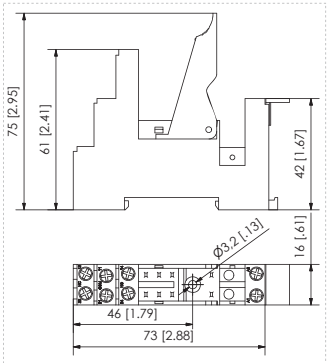

Features


Interface I/O (Input/Output)
DIN rail (35 mm, T35) or panel mount (EN 60715)
PCB relays and electronic modules allowed
According to IEC(EN 61812/1/4)
DIN/EN sequential numbering

Specifications


Nominal load	1C: 16A (250 V); 2C: 8A (250V)
Dielectric strength Vrms/1min	2,5 KV
Max. screw torque	1,2 Nm
Screws	M3 Steel. Pozi drive
Quick Clamp	Stainless steel
Wire in lets capacity: solid wire	4 mm^2 or 2 x 2,25 mm^2
Wire in lets capacity: multi-core	22 – 14 AWG
Weight	≤46gr
Room Temperature	-40°C to 70°C
Pack Units	20
Protection Category	IP 20

Weld-ong PCB sockets SFC

Weight	3gr
Pack Units	100






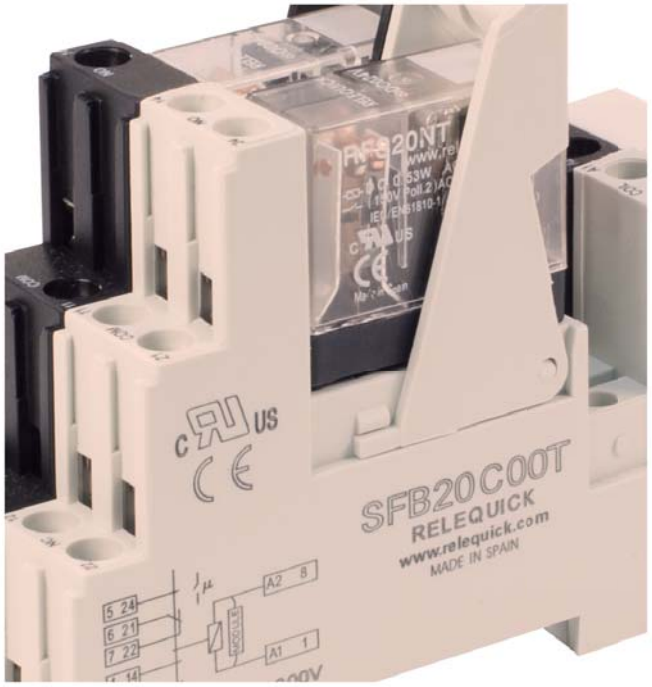

References

Reference	Contacts	Connection
SFB11C00T	1	Socket for relays 1 contact black
SFB10C00T	1	Socket for relays 1 contact grey
SFC11C11T	1	Weld-on PCB sockets 1 contact relay black
SFB21C00T	2	Socket for relays 2 contacts black
SFB20C00T	2	Socket for relays 2 contacts grey
SFC21C11T	2	Weld-on PCB sockets 2 contacts relays black

Series - T modules



M12-LM-AA	6/230 VDC protection diode (A1-)
M22-LM-AB	6/230 VDC protection diode (A1+)
M32-LM-BC	6/24 VDC protection diode & led (A1-)
M32-LM-BC	6/24 VDC protection diode & led (A1+)
M52-LM-DK	110/230 VAC RC supressor
M62-LM-EM	24/60 VAC/DC with led
M92-LM-EN	110/230 VAC/DC with led

Series - T modules - diagrams

