
The new standard of next-generation motor protection relay!

With smart protection and safe control, we provide the cutting-edge digital total solution.

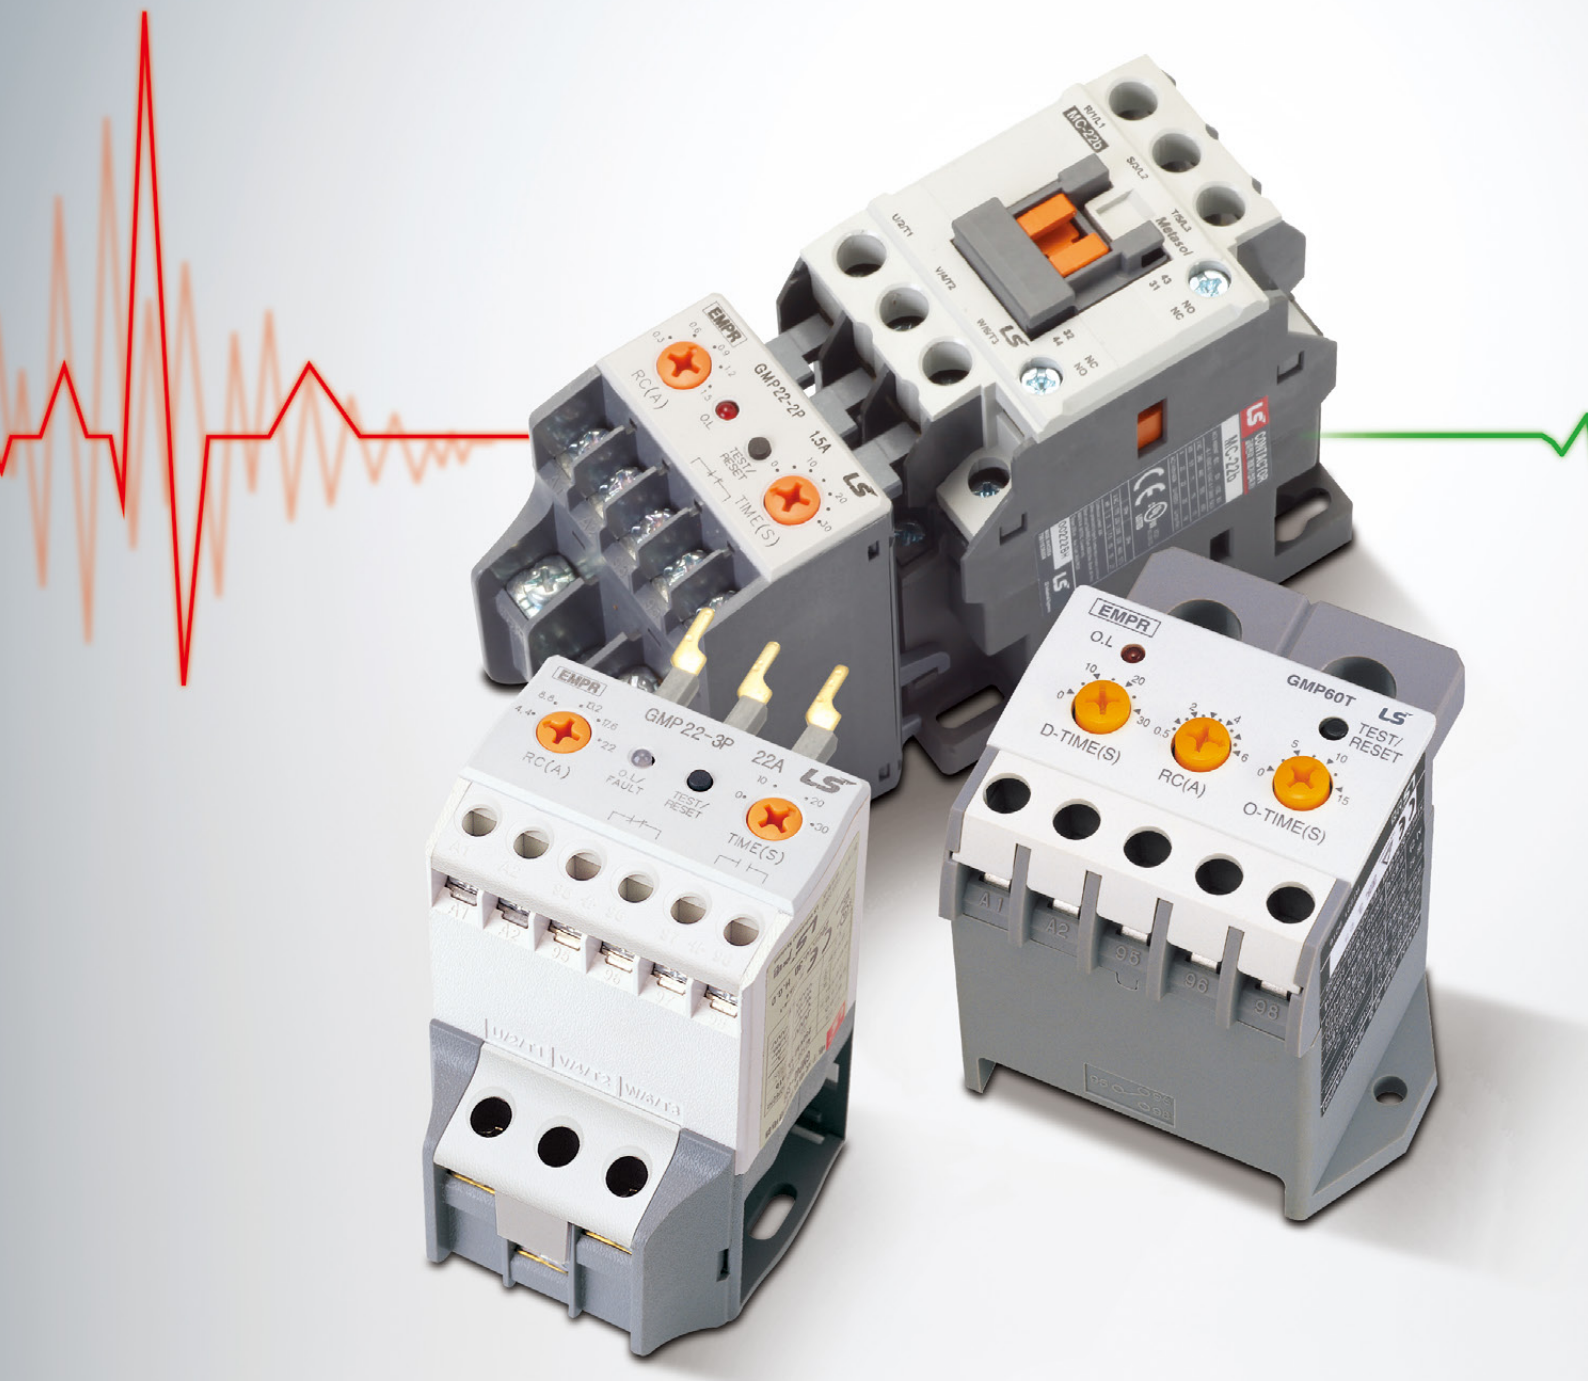


GMP Series

Electronic Motor Protection Relays

- Definite/inverse time protection of a variety of rating
- Ground fault protection model
- LED based display of failure cause
- MC direct coupling, penetration, and terminal types sharing

Contents

10 A list of standard models
11 Product characteristics
12 Motor selection & model numbering system
13 Rated specifications & order type
22 Operation & setting method
27 Terminal configuration / Wiring & cable connection
30 Dimensions

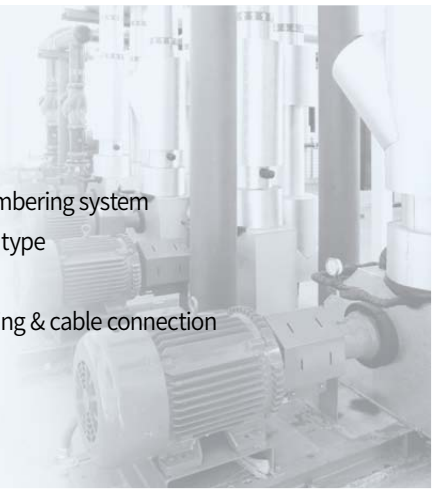


Motor selection & model numbering system

Motor selection

Current	Current setting range (A)	220~240VAC			380~440VAC		
		3-phase motor rating kW (Hp)		Full Load Current for the Motor(A)	3-phase motor rating kW (Hp)		Full Load Current for the Motor(A)
1.5	0.3-1.5	~0.18	(~0.25)	1.5	0.12~0.55	(~0.75)	1.6
5	1-5	0.18~0.75	(0.25~1)	4.8	0.25~1.5	(0.33~2)	4
22	4.4-22	1.1~4	(1.5~5.5)	18.8	3~7.5	(4~10)	17
20	4-20	0.75~3.7	(1~5)	17.4	2.2~7.5	(3~10)	17
40	8-40	2.2~7.5	(3~10)	34	4~15	(5.5~20)	32.5
80	16-80	4~18.5	(5.5~25)	79	7.5~37	(10~50)	74
06	0.5-6	0.09~0.75	(0.13~1)	4.8	0.12~2.2	(0.13~3)	5.5
30	3-30	0.37~5.5	(0.5~7.5)	26	1.1~11	(1.5~15)	24
60	0.5-60	1.1~11	(1~15)	48	3~22	(4~30)	46.5

Note) The above data can be different depending on a motor degree and a manufacturer. They are the reference values of AC Degree 3 Standard Squirrel Cage Motor.

Model numbering system

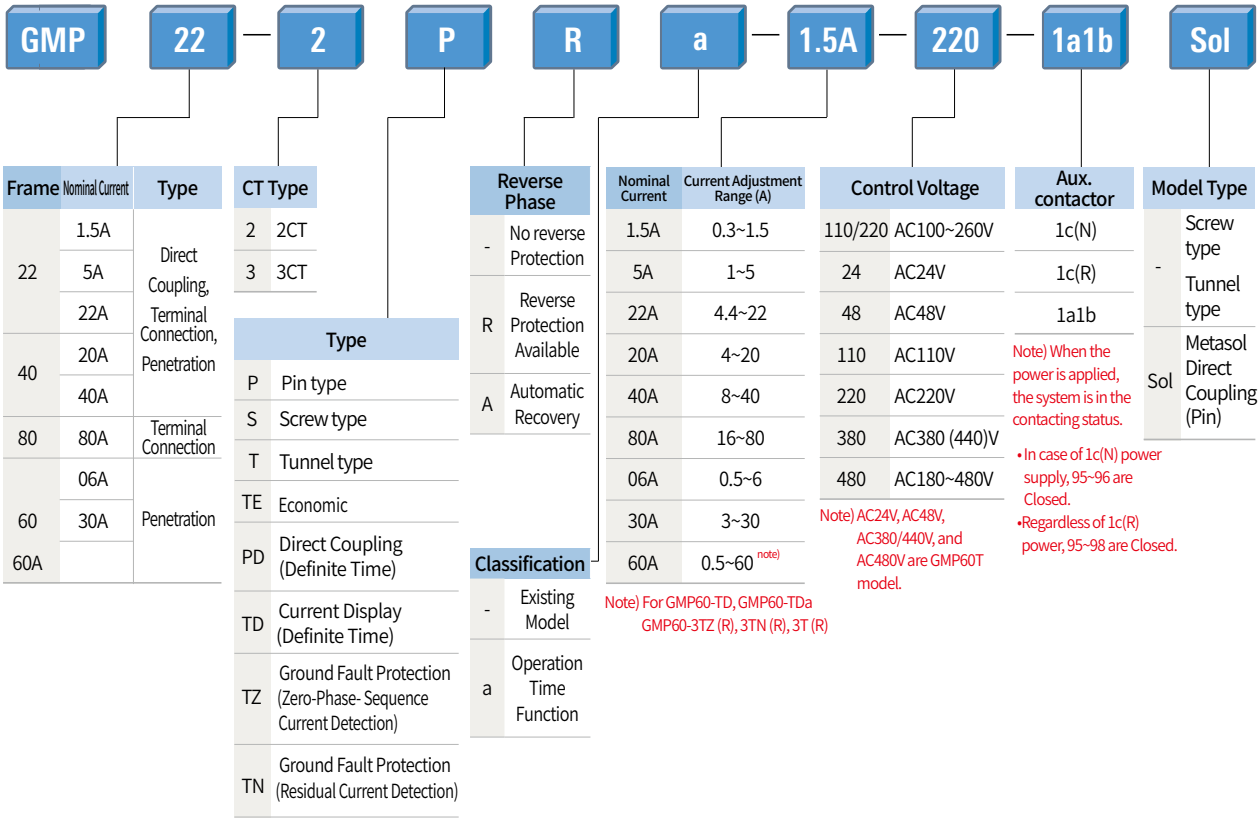




Revolutionary development of motor protection relays

Complete motor protection is realized with real time data processing and high precision.



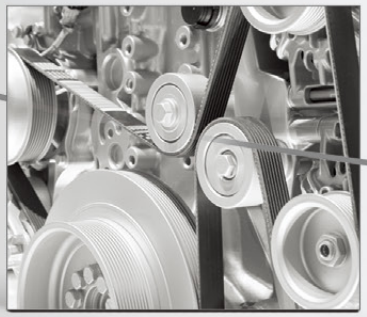







DMPi Series

Intelligent Digital Motor Protection Relays

- Definite/Inverse time option and various protection methods
- Storage of failure causes
- Separated display part using cables
- MODBUS communication, 4~20mA DC output
- Operating time displayed for each model

Contents

36 A list of standard models
37 Product characteristics
41 Rated specifications & model numbering system
42 Operation & setting method
51 Terminal configuration / Wiring & cable connection
57 Dimensions




Rated specifications & model numbering system

Rated specifications

Connection method		Penetrated / Terminal type
Protection functions		Overcurrent, phase fail, phase unbalance, stall, locked rotor,reverse phase, ground fault (Type option)Instance (Type option)
Connection method		Penetrated / Terminaltype
Operating time characteristics		Thermal heat build-up inverse time / Non-thermal heat build-up inverse time / Definite time
Rated current		0.5~6A/5~65A(Rating option upon placing an order)
Display		4 digit, 7-Segment
Operating power		AC/DC 85~260V(50Hz/60Hz)
Reset method	Automatic	1~20min (only for overcurrent)
	Manual	(Electrical reset)
Installation / Mounting method		Display can be installed separately, 35mm DIN rail / Screw installation
Tolerance	Current	±3%
	Time	±5%
	4~20mA output	±5%
Time setting	Startup delay	1~200sec
	Operation delay	1~60sec
Aux. contact	Composition	3-SPST(Power supply 1a1b, i nstantaneous operation 1a) Note1)
	Capacity	3A/250VAC Resistive Load
	Contact minimum load	100mA / 6VDC : (95-996, 97-98)
		10mA / 5VDC (07-08)
ZCT Input	External	200mA/100mV(Exclusive ZCT) Note2)
	Built-in	Support (Separate connection unnecessary Note2)
Service environment	Service temperature	-20°C ~ 60°C
	Storage temperature	-30°C ~ 70°C
	Relative humidity	within 80% RH, no condensation
Insulation resistance		100MΩ/500VDC
Lightning impulse voltage		1.2X50us 5kV Prototype waveform supply
Fast transient		2kV/1Min
Power consumption		Below 2W

Note 1. See No. 21 to 23 of A-Group in Setting menu If single phase is set, the device measures R/S/T phase. In HMI, the maximum phase of three phases is displayed without any indication of phase.
2. It is used when zero current detection type is selected.
3. This product is used to protect a low-voltage motor with 1000V or less

Model numbering system

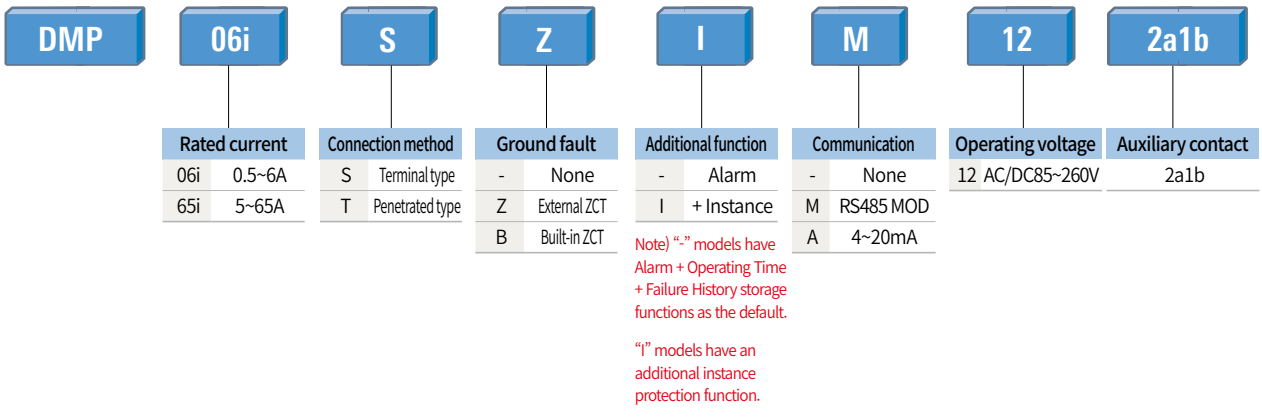



Perfect Selection of Motor Protection & Monitoring Device!

With the compact system structure and advanced protection functions, the device provides new standards of next-generation motor protection relay.



IMP Series

Intelligent Motor Protection Relays

- Ground fault protection for both zero current/residual current
- Support rated current 0.12~100A without external current transformer
- Definite/inverse time selection and diverse protection factors
- Basic application of ground fault/instance protection
- Separation of the display part with the use of Cable
- MODBUS communication and 4~20mA DC output

Contents

62 Product characteristics
64 Rated specifications & model numbering system
65 Operation & setting method
69 Terminal configuration / Wiring & cable connection
70 Dimensions

Rated specifications & model numbering system



Integral type



Extention type

Rated specifications

Protection		Over current, Lock/Stall, Phase failure, Phase unbalance, Reverse phase, Under current, Ground fault, Short circuit
Connection method		Extention type
Operating Time Characteristics		Heat accumulation inverse time / inverse time / definite time
Rated current		0.5~10A/5~100A (Separate)
Display		4digit, 7-Segment
Operating power		AC/DC 85~245V (50Hz/60Hz)
Return method	Auto	1~20min
	Manual / Electrical	On/Off Selectable
Installation / installation method		Display can be installed separately, 35mm DIN rail / Screw installation
Tolerance	Current	±5%
	Time	±5%
	4~20mA Output	±5%
Time setting	Startup delay	1~200sec
	Operation delay	1~60sec
Aux. contact	Configuration	3-SPST(Power supply 1a1b, instantaneous operation 1a) Note1)
	Capacity	3A/250VAC Resistive Load
	Contact minimum load	10mA / 5VDC
ZCT Input		200mA/100mV (Exclusive ZCT) Note2)
Environment	Operation	-10~55°C
	Storage	-20~70°C
	Relative humidity	within 80% RH, no condensation
Insulation Resistance		100Mohm/500VDC
Power consumption		1.2X50us 5kV Prototype waveform supply
Fast Transient		2kV/1Min
Power consumption		Below 3W

Note) 1. See No. 17-19 of A-Group in Setting menu.
2. It is used if zero current detection type is selected.
3. This product is designed for protecting a low-voltage motor with 1,000V or less. Therefore, it should not be used in high voltage lines.

Model numbering system

IMP — C — A420 — 10A — 110/220

Factors Protected	
C	Current

Communication	
NO	None
A420	4~20mA Output
M485	Modbus/RS-485

Current adjustment range	
10	0.5~10A
100	5~100A

Control Voltage	
110/220	AC/DC85~245V
24/36	AC/DC24~36V

Innovative Upgrade of Motor Control Panel!

More compact and Safer! We implement perfect motor protection.



- Power, Voltage, Current (measurement error: 1%)
- Power, Voltage, Current, Power Factor Protection
- Harmonic measurement (1st to 16th)
- Diverse motor starting types
  (Full voltage, Y-D, Reversible, Reactor, Inverter Starting)
- Modbus communication and 4~20mA

One model with various motor starting types

One S-EMPR model is applicable to various motor staring types, such as full voltage starting, Y-△ starting, reversible staring, Reactor starting, and Inverter starting.

A variety of SCADA functions based on sequence structure

With a simple sequence, it is possible to not only control local operation panel (LOP) and MCC panel, but conduct Supervisory Control And Data Acquisition through SPLC or DCS based auto operation and communication.




MMP Series

Smart Electronic Motor Protection Relays

- Current, Voltage, Power Measurement and Power Factor Protection
- Instantaneous interruption compensation and restarting
- Harmonic measurement (1st to 16th)
- Modbus communication and 4~20mA

Contents

74 Product characteristics
83 Rated specifications & model numbering system
84 Operation & setting method
96 Terminal configuration / Wiring & cable connection
103 Dimensions

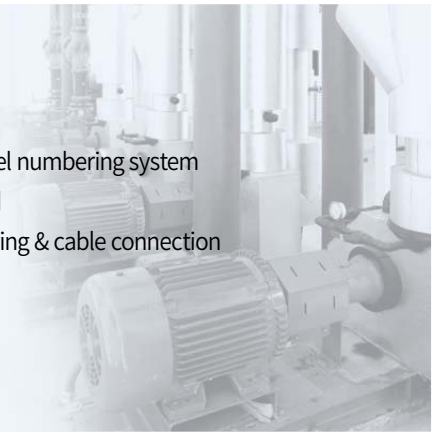

Rated specifications & model numbering system

Rated specifications

Connection		Tunnel type (Passing through CT holes)
Operation characteristic		Thermal-inverse / Inverse / Definite
Rated current		0.5~10A/5~100A (Select Rated on Order)
Display screen		4 digit, 7-Segment, LED
Control Power		110Vac or 220Vac 50/60Hz
Reset	Auto	1-20 minutes
	Manual	ON / OFF selectable
Mounting		Display unit : sepatately mountable
Accuracy		Current and voltage metering : ± 1% of rating or ± 2% of minimum rating
		4~20mA output : ± 5%
Time delay	Start	1-200 seconds
	Operation	1-60 seconds
Auxiliary contacts		6 contacts (3A / 250VAC at resistive load, power type based)
	Contact minimum load	10mA / 5VDC
ZCT input		Basic installation of built-in ZCT External ZCT (200mA/1.5mA, universal ZCT connectable)
I/O assured voltage	110V Type	63V ±10%
	220V Type	140V ±10%
Environment	Operation Temp.	-10~55°C
	Storage Temp.	-20~70°C
	Humidity	within 80% RH, no condensation
Insulation resistance		100MΩ/500VDC
Lightning impulse voltage		1.2 × 50μs 5kV standard waveform applied
Fast Transient		2kV/1Min
Power consumption		5W or under

Model numbering system

