
C/06


Change Over Switches

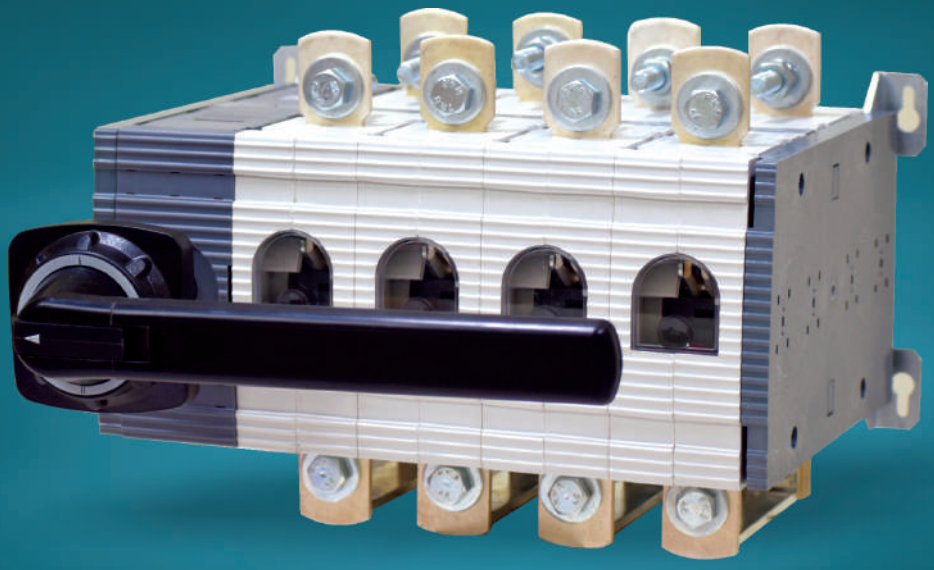

ROVE Electric Pvt Ltd.


Change Over Switches I-0-II operation, open transition RVCO 20...125 A


Change Over Switches I-0-II operation, open transition with pistol handle, base mounting, including a black ON-OFF-ON plastic handle and shaft as standard, The handle is IP65 protected, padlockable in the OFF position and with door interlock in the ON position. The shaft can be adjusted to different installation depths.



No. of poles	I_{th} (open) [A]	Cable cross section [mm²]	Rated operat. currents AC22A/ AC23A 400 v [A/A]	Type	Order No	Delivery batch [pcs]	Weight/ unit [Kg]
3	20	0.75...10	20/20	RVCO2003	RVECO0020M03H3	10	1.0
4	20	0.75...10	20/20	RVCO2004	RVECO0020M03H3	10	1.28
3	25	0.75...10	25/25	RVCO2503	RVECO0025M03H3	10	1.0
4	25	0.75...10	25/25	RVCO2504	RVECO0025M03H3	10	1.28
3	32	0.75...10	32/32	RVCO3203	RVECO0032M03H3	10	1.0
4	32	0.75...10	32/32	RVCO3204	RVECO0032M03H3	10	1.28
3	40	0.75...10	40/40	RVCO4003	RVECO0040M03H3	10	1.0
4	40	0.75...10	40/40	RVCO4004	RVECO0040M03H3	10	1.28
3	50	1.5...35	50/50	RVCO5003	RVECO0050M03H3	10	1.0
4	50	1.5...35	50/50	RVCO5004	RVECO0050M03H3	10	1.28
3	63	1.5...35	63/63	RVCO6303	RVECO0063M03H3	10	1.0
4	63	1.5...35	63/63	RVCO6304	RVECO0063M03H3	10	1.28
3	80	1.5...35	80/80	RVCO8003	RVECO0080M03H3	10	1.0
4	80	10...70	80/80	RVCO8004	RVECO0080M03H3	10	1.28
3	100	10...70	100/100	RVCO10003	RVECO0100M03H3	10	1.0
4	100	10...70	100/100	RVCO10004	RVECO0100M03H3	10	1.28
3	125	10...70	125/125	RVCO12503	RVECOS125M03H3	10	1.0
4	125	10...70	125/125	RVCO12504	RVECOS125M03H3	10	1.28

Shafts and handles included as standard

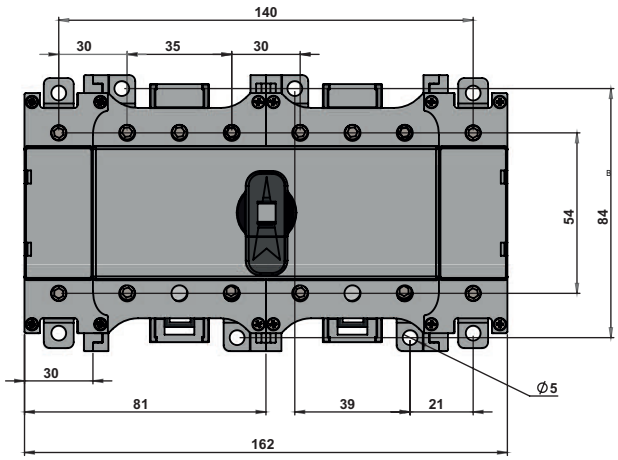


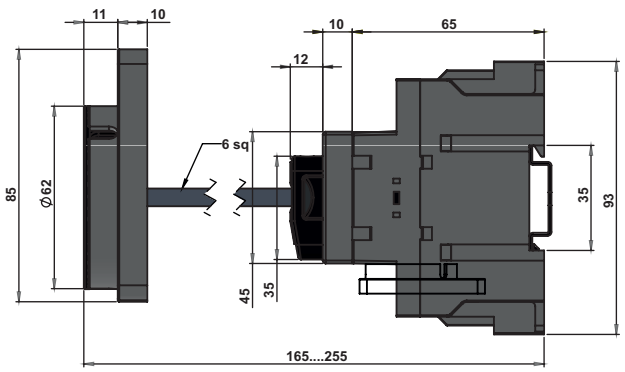

Ordering information & Mounting dimension


Front operated Change Over Switches RVCO125...RVCO250A

Change Over Switches I-0-II operation, open transition with pistol handle, base mounting, including a black ON-OFF-ON plastic handle and shaft as standard, The handle is IP65 protected, padlockable in the OFF position and with door interlock in the ON position. The shaft can be adjusted to different installation depths.

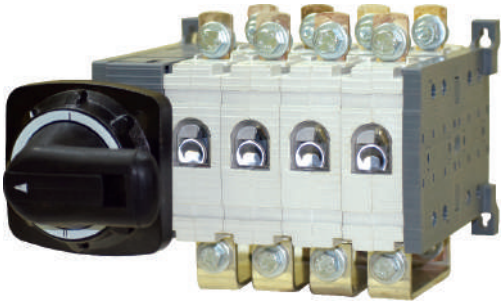

No. of poles	I_{th} (open) [A]	Rated operat. currents AC22A/ AC23A 400 V [A/A]	Type	Order number	Units/ type [pcs]	Weight/ unit [Kg]
3	200	200/125	RVCO12503	RVECO0125M03H3	1	3.42
4	200	200/125	RVCO12504	RVECO0125M04H3	1	4.10
3	200	200/125	RVCO12512	RVECO0125M12H3	1	3.42
4	200	200/125	RVCO12522	RVECO0125M22H3	1	4.10
3	200	200/160	RVCO16003	RVECO0160M03H3	1	3.42
4	200	200/160	RVCO16004	RVECO0160M04H3	1	4.10
3	200	200/160	RVCO16012	RVECO0160M12H3	1	3.42
4	200	200/160	RVCO16022	RVECO0160M22H3	1	4.10
3	200	200/200	RVCO20003	RVECO0200M03H3	1	3.42
4	200	200/200	RVCO20004	RVECO0200M04H3	1	4.10
3	200	200/200	RVCO20012	RVECO0200M12H3	1	3.42
4	200	200/200	RVCO20022	RVECO0200M22H3	1	4.10
3	250	250/250	RVCO25003	RVECO0250M03H3	1	3.52
4	250	250/250	RVCO25004	RVECO0250M04H3	1	4.20
3	250	250/250	RVCO25012	RVECO0250M12H3	1	3.52
4	250	250/250	RVCO25022	RVECO0250M22H3	1	4.20
3	315	315/315	RVCO31503	RVECOS315M03H3	1	3.52
4	315	315/315	RVCO31504	RVECOS315M04H3	1	4.20
3	315	315/315	RVCO31512	RVECOS315M12H3	1	3.52
4	315	315/315	RVCO31522	RVECOS315M22H3	1	4.20


Shaft, shorting links, handle included as standard
Any other combinations are available on request

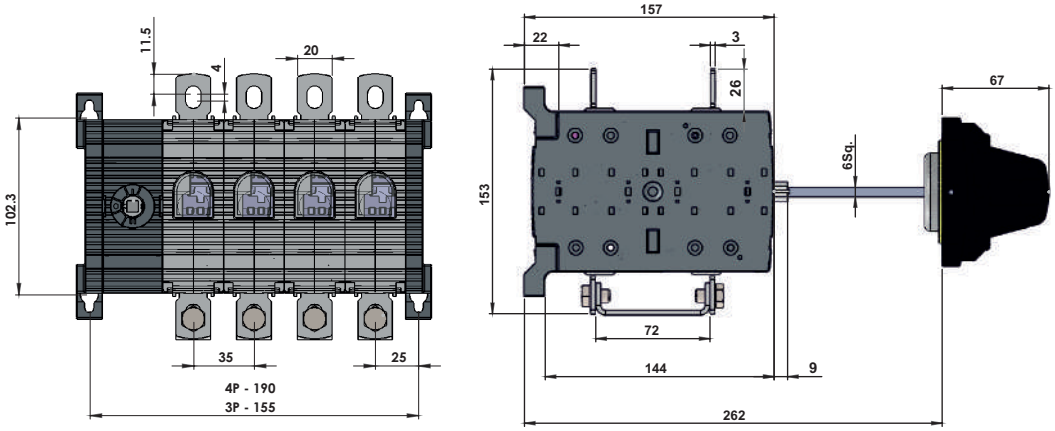

Ordering information & Mounting dimension


Front operated Change Over Switches RVCO 315...RVCO 630A


Change Over Switches I-0-II operation, open transition with pistol handle, base mounting, including a black ON-OFF-ON plastic handle and shaft as standard, The handle is IP65 protected, padlockable in the OFF position and with door interlock in the ON position. The shaft can be adjusted to different installation depths.

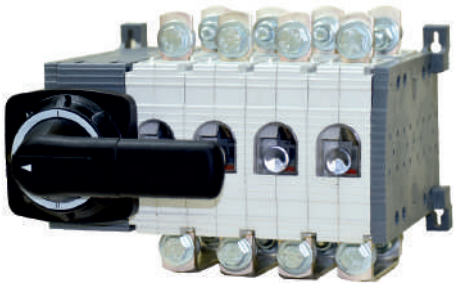

No. of poles	I_{th} (open) [A]	Rated operat. currents AC22A/ AC23A 400 V [A/A]	Type	Order number	Units/ type [pcs]	Weight/ unit [Kg]
3	315	315/315	RVCO31503	RVECO0315M03H3	1	6.82
4	315	315/315	RVCO31504	RVECO0315M04H3	1	8.10
3	315	315/315	RVCO31512	RVECO0315M12H3	1	6.82
4	315	315/315	RVCO31522	RVECO0315M22H3	1	8.10
3	400	400/400	RVCO40003	RVECO0400M03H3	1	7.20
4	400	400/400	RVCO40004	RVECO0400M04H3	1	8.40
3	400	400/400	RVCO40012	RVECO0400M12H3	1	7.20
4	400	400/400	RVCO40022	RVECO0400M22H3	1	8.40
3	500	500/500	RVCS50003	RVECOS500M03H3	1	7.20
4	500	500/500	RVCS50004	RVECOS500M04H3	1	8.40
3	500	500/500	RVCS50012	RVECOS500M12H3	1	7.40
4	500	500/500	RVCS50022	RVECOS500M22H3	1	8.40
3	630	630/630	RVCS63003	RVECOS500M03H3	1	7.80
4	630	630/630	RVCS63004	RVECOS500M04H3	1	8.80
3	630	630/630	RVCS63012	RVECOS500M12H3	1	7.80
4	630	630/630	RVCS63022	RVECOS500M22H3	1	8.80

Shaft, shorting links, handle included as standard
Any other combinations are available on request

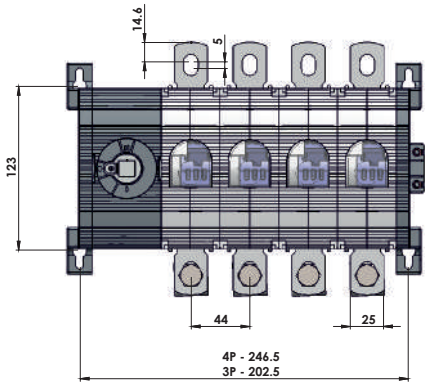


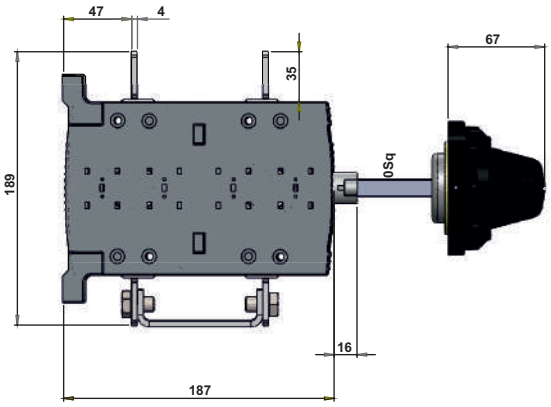

Ordering information & Mounting dimension


Front operated Change Over Switches RVCO 500...RVCO 800 A

Change Over Switches I-0-II operation, open transition with pistol handle, base mounting, including a black ON-OFF-ON plastic handle and shaft as standard, The handle is IP65 protected, padlockable in the OFF position and with door interlock in the ON position. The shaft can be adjusted to different installation depths.

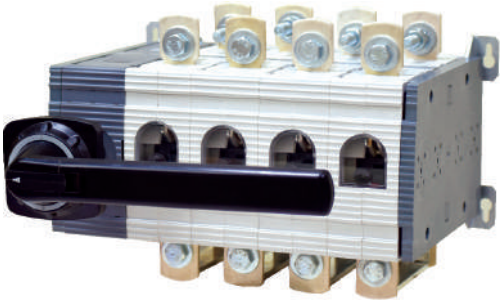

No. of poles	I_{th} (open) [A]	Rated operat. currents AC22A/ AC23A 400 v [A/A]	Type	Order number	Units/ type [pcs]	Weight/ unit [Kg]
3	500	500/500	RVCO50003	RVECO0500M03H3	1	17.10
4	500	500/500	RVCO50004	RVECO0500M04H3	1	20.90
3	500	500/500	RVCO50012	RVECO0500M12H3	1	17.10
4	500	500/500	RVCO50022	RVECO0500M22H3	1	20.90
3	630	630/630	RVCO63003	RVECO0630M03H3	1	17.10
4	630	630/630	RVCO63003	RVECO0630M04H3	1	20.90
3	630	630/630	RVCO63012	RVECO0630M12H3	1	17.10
4	630	630/630	RVCO63022	RVECO0630M22H3	1	20.90
3	800	800/800	RVCO80003	RVECO0800M03H3	1	17.10
4	800	800/800	RVCO80004	RVECO0800M04H3	1	20.90
3	800	800/800	RVCO80012	RVECO0800M12H3	1	17.10
4	800	800/800	RVCO80022	RVECO0800M22H3	1	20.90


Shaft, shorting links, handle included as standard
Any other combinations are available on request

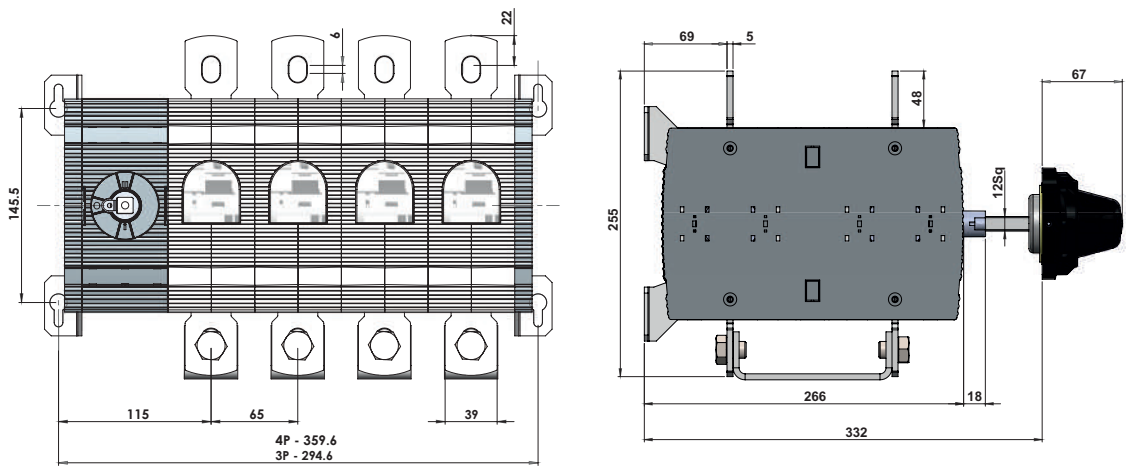

Ordering information & Mounting dimension

Front operated Change Over Switches RVCO 1000...RVCO 1600 A

Change Over Switches I-0-II operation, open transition with pistol handle, base mounting, including a black ON-OFF-ON plastic handle and shaft as standard, The handle is IP65 protected, padlockable in the OFF position and with door interlock in the ON position. The shaft can be adjusted to different installation depths.

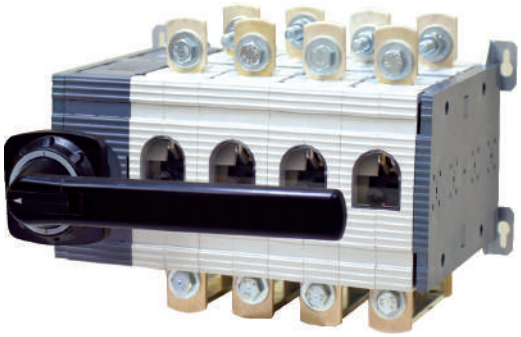

No. of poles	I_{th} (open) [A]	Rated operat. currents AC22A/ AC23A 400 v [A/A]	Type	Order number	Units/ type [pcs]	Weight/ unit [Kg]
3	1000	1000/1000	RVCO100003	RVECO1000M03H3	1	37.20
4	1000	1000/1000	RVCO100004	RVECO1000M04H3	1	46.00
3	1000	1000/1000	RVCO100012	RVECO1000M12H3	1	37.20
4	1000	1000/1000	RVCO100022	RVECO1000M22H3	1	46.00
3	1250	1250/1250	RVCO125003	RVECO1250M03H3	1	37.20
4	1250	1250/1250	RVCO125004	RVECO1250M04H3	1	46.00
3	1250	1250/1250	RVCO125012	RVECO1250M12H3	1	37.20
4	1250	1250/1250	RVCO125022	RVECO1250M22H3	1	46.00
3	1600	1600/1600	RVCO160003	RVECO1600M03H3	1	48.20
4	1600	1600/1600	RVCO160004	RVECO1600M04H3	1	61.30
3	1600	1600/1600	RVCO160012	RVECO1600M12H3	1	48.20
4	1600	1600/1600	RVCO160022	RVECO1600M22H3	1	61.30

Shaft, shorting links, handle included as standard
Any other combinations are available on request

