
The new standard of next-generation motor protection relay!

With smart protection and safe control, we provide the cutting-edge digital total solution.

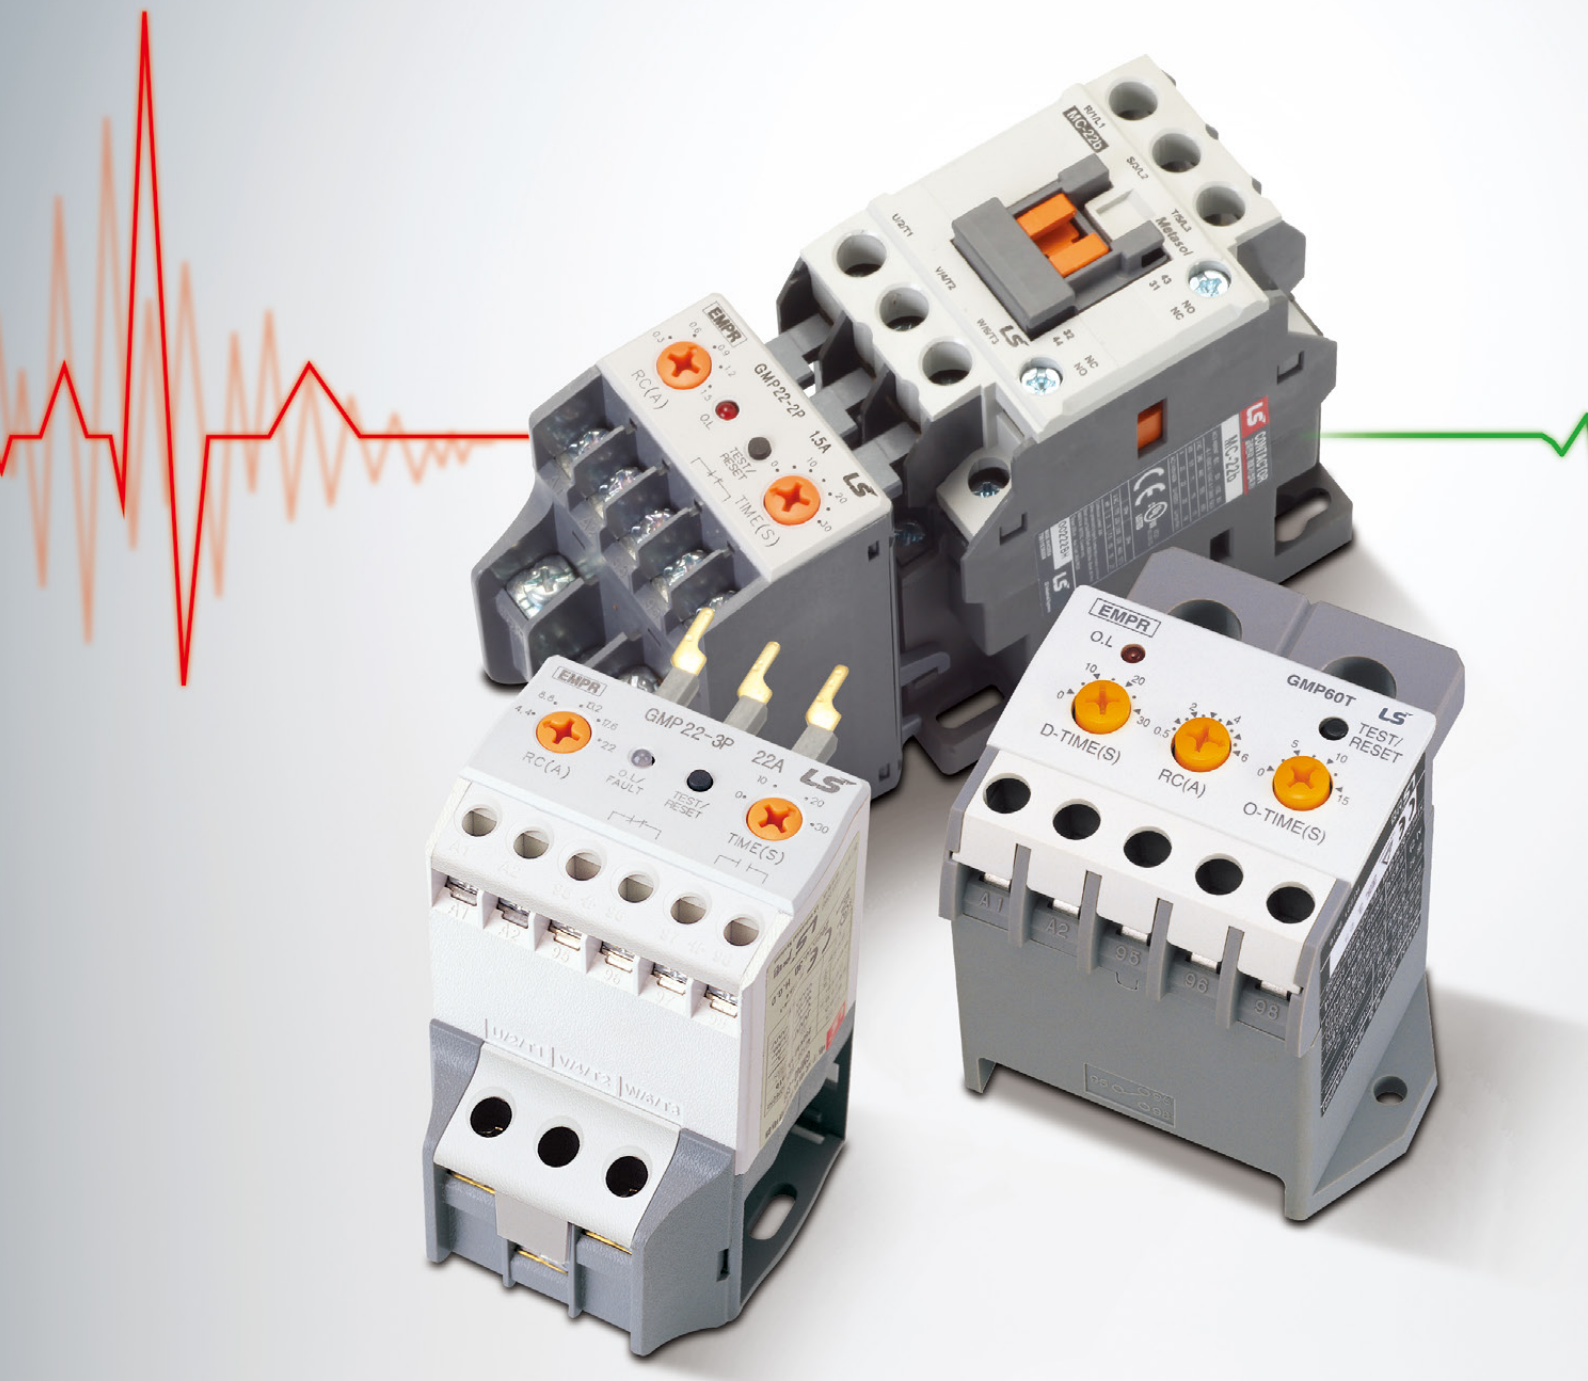


GMP Series

Electronic Motor Protection Relays

- Definite/inverse time protection of a variety of rating
- Ground fault protection model
- LED based display of failure cause
- MC direct coupling, penetration, and terminal types sharing

Contents

10 A list of standard models
11 Product characteristics
12 Motor selection & model numbering system
13 Rated specifications & order type
22 Operation & setting method
27 Terminal configuration / Wiring & cable connection
30 Dimensions

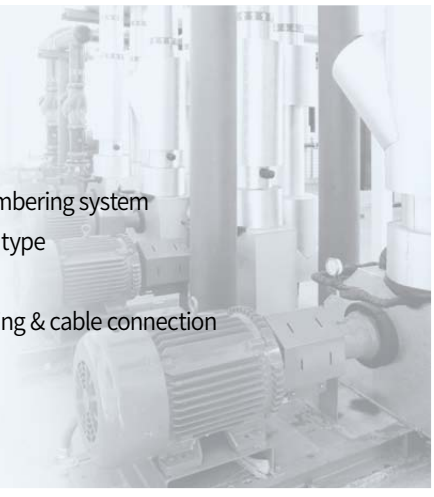

GMP22-2P, 2PD 1c




GMP22-2P(1c)
GMP22-2PD(1c)

Specification (Direct type EMPR)


Connection: Accessible electronic contactors	Minimum direct connection with width 44mm : MC-9b, 12b, 18b, 22b
Auxiliary contact	1SPDT 1c (N type) note1)
Current setting range	0.3~1.5/1~5/4.4~22A
Operating time characteristics	Inverse time, Definite time (PD)
Number of built-in CT (deflector)	2 (R, T phase)
Operating power	AC 110/220V (±10%)
Return (reset) method/time	Manual/Electrical return
Using Inverter Secondary	Available

Type		GMP22-2P (1c) Sol	GMP22-2PD (1c) Sol
Protection	Overcurrent	✓	✓
	Lock/Stall	✓	✓
	Phase failure	✓ note 2)	✓ note 2)
Certification	UL, CE	✓	

Contactor
MC-9b, 12b, 18b, 22b

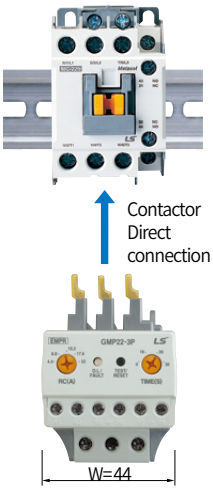

Order type

Type	Model/CT	Operating characteristics	Current setting range	Order type
Pin type	GMP22-2P(1c) - 2CT type	Inverse time (0~30sec) 	0.3 - 1.5A	GMP22-2P(1c) 1.5A Sol
			1 - 5A	GMP22-2P(1c) 5A Sol
			4.4 - 22A	GMP22-2P(1c) 22A Sol
			0.3 - 1.5A	GMP22-2P(1c) 1.5A [N]
			1 - 5A	GMP22-2P(1c) 5A [N]
			4.4 - 22A	GMP22-2P(1c) 22A [N]
			0.3 - 1.5A	GMP22-2P(1c) 1.5A [R]
			1 - 5A	GMP22-2P(1c) 5A [R]
			4.4 - 22A	GMP22-2P(1c) 22A [R]
	GMP22-2PD(1c) - 2CT type	Definite time D-Time : 0~60sec O-Time : 5sec(Fixed) 	0.3 - 1.5A	GMP22-2PD(1c) 1.5A Sol
			1 - 5A	GMP22-2PD(1c) 5A Sol
			4.4 - 22A	GMP22-2PD(1c) 22A Sol
			0.3 - 1.5A	GMP22-2PD(1c) 1.5A [N]
			1 - 5A	GMP22-2PD(1c) 5A [N]
			4.4 - 22A	GMP22-2PD(1c) 22A [N]
			0.3 - 1.5A	GMP22-2PD(1c) 1.5A [R]
			1 - 5A	GMP22-2PD(1c) 5A [R]
			4.4 - 22A	GMP22-2PD(1c) 22A [R]

Note) 1. 1c contacts have two types of products: N-type (Fail Safe/Normal Energyed) and R-type(Non Fail Safe / Normal De-Energyed). In terms of product reliability, N-type (Fail Safe) product is recommended to be used.
2. The product detects phase failure of the phase (R, T) connected with two CTs in order for protection.



Technical information

Installation	Direct connection to contactors (not alone)
Tolerance	Current : ±5% Time : ±5% (or±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Min 100MΩ at 500Vdc
Lightning impulse voltage	1.2×50μs 5kV With standard waveform (IEC1000-4-5)
Fast Transient Burst	2kV/5min (IEC1000-4-4)
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	Red LED
Application specification	UL508, IEC60947-1

Rated specifications & order type

GMP22-□



Pin type
GMP22-□P, PR




Screw type
GMP22-□S, SR



Tunnel type
GMP22-□T, TR

Specification

Various connection methods : Electronic contactors applied	Pin, Screw, Tunnel type : MC-9b, 12b, 18b, 22b
Auxiliary contact	2SPST (1a1b at energization)
Current setting range	0.3~1.5/1~5/4.4~22A
Operating time characteristics	Inverse time
Number of built-in CT (deflector)	2 (R, Tphase) or 3
Operating power	AC 100~260V
Return (reset) method/time	Manual/Electrical return (Standard) Manual/Auto/Electrical return (2PA)
Using Inverter Secondary	Available (Exclude GMP22-3PR, 3TR, 3SR)





Inverse time

*GMP22-2PA automatically returns within 60 seconds in case of overcurrent.

Type (GMP22-□)		2P, 2PA, 2T, 2S	3P, 3T, 3S	3PR, 3TR, 3SR
Protection	Overcurrent	✓	✓	✓
	Lock/Stall	✓ note)	✓	✓
	Phase failure	✓	✓	✓
	Phase unbalance	-	✓	✓
	Reverse phase	-	-	✓
Certification	UL, CE	✓ (Exclude 2PD)	✓	✓

Note) The product detects phase failure of the phase (R, T) connected with two CTs in order for protection.

Order type

Mounting type	Model/CT	Current setting range	Order type
Direct mount onto a Metasol MC  Electronic contactor MC-9b, 12b, 18b, 22b	GMP22-2P (1a1b) - 2CT type	0.3 - 1.5A	GMP22-2P(1a1b) 1.5A Sol
		1 - 5A	GMP22-2P(1a1b) 5A Sol
		4.4 - 22A	GMP22-2P(1a1b) 22A Sol
	GMP22-2PA (1a1b) - 2CT type - Automatic return	0.3 - 1.5A	GMP22-2PA(1a1b) 1.5A Sol
		1-5A	GMP22-2PA(1a1b) 5A Sol
		4.4-22A	GMP22-2PA(1a1b) 22A Sol
	GMP22-3P - 3CT type	0.3 - 1.5A	GMP22-3P 1.5A Sol
		1 - 5A	GMP22-3P 5A Sol
		4.4 - 22A	GMP22-3P 22A Sol
	GMP22-3PR - 3CT type - Reverse phase protection	0.3 - 1.5A	GMP22-3PR 1.5A Sol
		1 - 5A	GMP22-3PR 5A Sol
		4.4 - 22A	GMP22-3PR 22A Sol
Screw type  Install Screw/Rail	GMP22-2S - 2CT type	0.3 - 1.5A	GMP22-2S 1.5A
		1 - 5A	GMP22-2S 5A
		4.4 - 22A	GMP22-2S 22A
	GMP22-3S - 3CT type	0.3 - 1.5A	GMP22-3S 1.5A
		1-5A	GMP22-3S 5A
		4.4-22A	GMP22-3S 22A
	GMP22-3SR - 3CT type - Reverse phase protection	0.3 - 1.5A	GMP22-3SR 1.5A
		1 - 5A	GMP22-3SR 5A
		4.4 - 22A	GMP22-3SR 22A
Tunnel type  Install Screw/Rail	GMP22-2T - 2CT type	0.3 - 1.5A	GMP22-2T 1.5A
		1 - 5A	GMP22-2T 5A
		4.4 - 22A	GMP22-2T 22A
	GMP22-3T - 3CT type	0.3 - 1.5A	GMP22-3T 1.5A
		1-5A	GMP22-3T 5A
		4.4-22A	GMP22-3T 22A
	GMP22-3TR - 3CT type - Reverse phase protection	0.3 - 1.5A	GMP22-3TR 1.5A
		1 - 5A	GMP22-3TR 5A
		4.4 - 22A	GMP22-3TR 22A

GMP40-□



Pin type
GMP40-□P, PR




Screw type
GMP40-□S, SR



Tunnel type
GMP40-□T, TR

Specification

Various connection methods : Electronic contactors applied	Pin, Screw, Tunnel type : MC-32a, 40a
Auxiliary contact	2SPST (1a1b at energization)
Current setting range	4~20/8~40A
Operating time characteristics	Inverse time, Definite time (2PD)
Number of built-in CT (deflector)	2 (R, T phase) or 3
Operating power	AC 100~260V
Return (reset) method/time	Manual/Electrical return (Standard) Manual/Auto/Electrical return (2PA)
Using Inverter Secondary	Available (Exclude GMP40-3PR, 3TR, 3SR)





Inverse time

*GMP40-2PA automatically returns within 60 seconds in case of overcurrent.

Type (GMP22-□)		2P, 2PD, 2PA, 2T, 2S	3P, 3T, 3S	3PR, 3TR, 3SR
Protection	Overcurrent	✓	✓	✓
	Lock/Stall	✓	✓	✓
	Phase failure	✓ note)	✓	✓
	Phase unbalance	-	✓	✓
	Reverse phase	-	-	✓
Certification	UL, CE	✓ (Exclude PD, PA)	✓	✓

Note) The product detects phase failure of the phase (R, T) connected with two CTs in order for protection.

Order type

Mounting type	Model/CT	Current setting range	Order type
Direct mount onto a Metasol MC  Electronic contactor MC-32a, 40a	GMP40-2P - 2CT type	4 - 20A	GMP40-2P 20A Sol
		8 - 40A	GMP40-2P 40A Sol
	GMP40-2PA - 2CT type - Automatic return	4-20A	GMP40-2PA 20A Sol
		8-40A	GMP40-2PA 40A Sol
	GMP40-2PD - 2CT type - Defined Time characteristics	4-20A	GMP40-2PD 20A Sol
		8-40A	GMP40-2PD 40A Sol
	GMP40-3P - 3CT type	4 - 20A	GMP40-3P 20A Sol
		8 - 40A	GMP40-3P 40A Sol
	GMP40-3PR - 3CT type - Reverse phase protection	4 - 20A	GMP40-3PR 20A Sol
		8 - 40A	GMP40-3PR 40A Sol
Screw type  Install Screw/Rail	GMP40-2S - 2CT type	4 - 20A	GMP40-2S 20A
		8 - 40A	GMP40-2S 40A
	GMP40-3S - 3CT type	4 - 20A	GMP40-3S 20A
		8 - 40A	GMP40-3S 40A
	GMP40-3SR - 3CT type - Reverse phase protection	4 - 20A	GMP40-3SR 20A
		8 - 40A	GMP40-3SR 40A
Tunnel type  Install Screw/Rail	GMP40-2T - 2CT type	4 - 20A	GMP40-2T 20A
		8 - 40A	GMP40-2T 40A
	GMP40-3T - 3CT type	4 - 20A	GMP40-3T 20A
		8 - 40A	GMP40-3T 40A
	GMP40-3TR - 3CT type - Reverse phase protection	4 - 20A	GMP40-3TR 20A
		8 - 40A	GMP40-3TR 40A

Rated specifications & order type

GMP22/40-□




GMP22




GMP40


Front face configuration

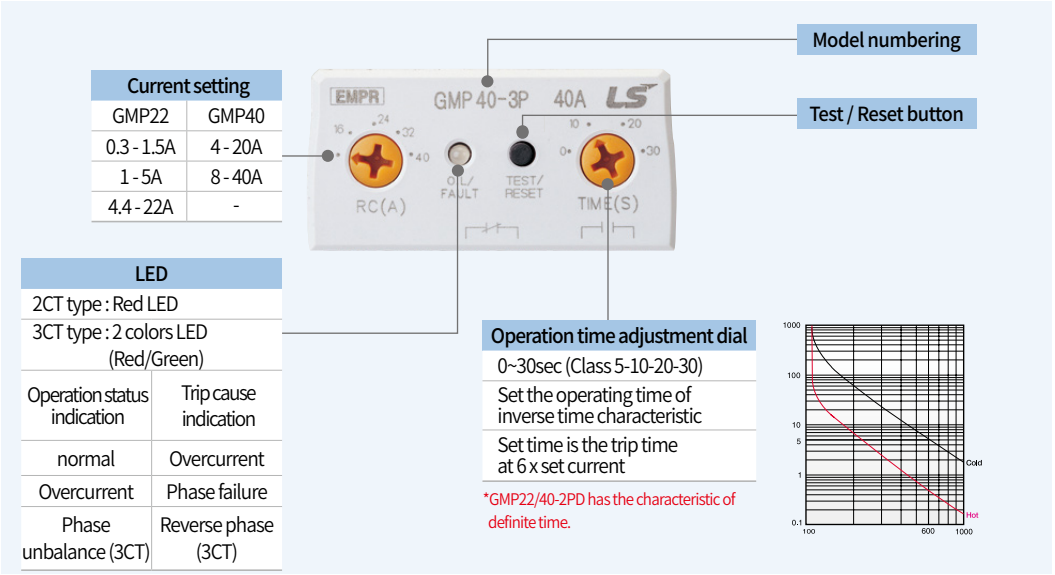

Sharing of installation and contact

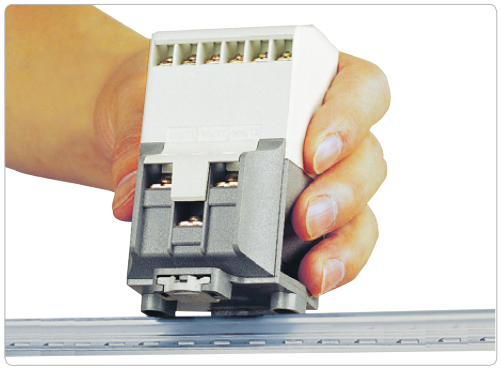

Screw installation ↔ Rail installation sharing
Terminal connection type and penetration type have the common use structure of DIN rail and screw installation.

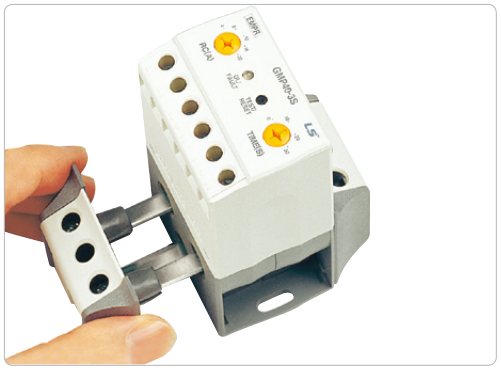

Terminal connection type ↔ penetration type sharing
If the terminal block of terminal connection type is removed, it is possible to make a penetration type

Technical information

Tolerance	Current : ±5% Time : ±5% (or ±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Minimum 100MΩ/500VDC
Lightning impulse voltage	1.2×50μs 5kV With standard waveform (IEC60255-22-5)
Fast Transient Burst	2kV/1min (IEC61000-4-4)
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	2CT : Red LED, 3CT : Red/Green 2 colors LED
Application specification	IEC60947-1


GMP60T



GMP60T

Specification (Tunnel type /Economic type EMPR)


Connection methods	Tunnel type
Auxiliary contact	1SPDT 1c (N type) note 1)
Current setting range	0.5~6/3~30/5~60A
Operating time characteristics	Definite time
Number of built-in CT (deflector)	2 (R, T type)
Operating power	AC24V/48V/110V/220V/380V(440) AC180~480V AC110V/220V (GMP60TA)
Return (reset) method/time	Manual/Electrical return (Standard) Manual/Auto/Electrical return (60TA)
Using Inverter Secondary	Available



Definite time

Type (GMP22-□)		GMP60T	GMP60TE	GMP60TA
Protection	Overcurrent	✓	✓	✓
	Lock/Stall	✓	✓	✓
	Phase failure	✓ note 2)	✓ note 2)	✓ note 2)
Operation time setting		0~30sec	5sec (Fixed)	5sec (Fixed)
Auto-return setting		-	-	0~120sec
Certification	UL, CE	✓	✓	-

Note) 1. 1c contacts have two types of products: N-type (Fail Safe/Normal Energyed) and R-type(Non Fail Safe / Normal De-Energyed). In terms of product reliability, N-type (Fail Safe) product is recommended to be used
2. The product detects phase failure of the phase (R, T) connected with two CTs in order for protection.



If external CT (current transformer) is used, the product is applicable to a large current of 60A or more.

Order type

Mounting type	Model/CT	Operating characteristics	Current setting range	Order type
Pin type	GMP60T - 2CT type	Defined Time characteristics D-Time : 0~30sec O-Time : 0~15sec	0.5 - 6A	GMP60T 6A
			3 - 30A	GMP60T 30A
			5 - 60A	GMP60T 60A
	GMP60TE - 2CT type - Economic type	Defined Time characteristics D-Time : 0~30sec O-Time : 5sec (Fixed)	0.5 - 6A	GMP60TE 6A
			3 - 30A	GMP60TE 30A
			5 - 60A	GMP60TE 60A
	GMP60TA - 2CT type - Auto-return	Defined Time characteristics D-Time : 0~30sec O-Time : 5sec (Fixed) A-Time : 0~120sec	0.5 - 6A	GMP60TA 6A
			3 - 30A	GMP60TA 30A
			5 - 60A	GMP60TA 60A

*Auto Reset: applicable only at Overcurrent Trip

Technical information

Install	Screw / rail mounting
Tolerance	Current : ±5% Time : ±5% (or ±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Minimum 100MΩ/500VDC
Lightning impulse voltage	1.2×50μs 5kV With standard waveform (IEC60255-22-5)
Fast Transient Burst	2kV/1min (IEC61000-4-4)
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	Red LED
Application specification	IEC60947-1

Rated specifications & order type


GMP6-TD, TDa



GMP60-TD
GMP60-TDa

Specification (Tunnel type/3-phase current indication type EMPR)

Connection methods	Tunnel type
Auxiliary contact	2SPST (1a1b at energization)
Current setting range	0.5~60A
Current Ratio	0.25, 0.5, 1~120 (0.125~600A)
Operating time characteristics	Definite time
Number of built-in CT (deflector)	2 (R, T type)
Operating power	AC 110V/220V (Separate)
Return (reset) method/time	Manual (GMP60-TD) Manual/Auto (GMP60-TDa)
Using Inverter Secondary	Available



Definite time

Type		GMP60-TD	GMP60-TDa
Protection	Overcurrent	✓	✓
	Lock/Stall	✓	✓
	Phase failure	✓ note)	✓ note)
	Low current	-	✓
Auto-return setting		-	✓
Operation time setting		-	✓
Save the last fault cause		-	✓

Note) The product detects phase failure of the phase (R, T) connected with two CTs in order for protection.



Current control range by
Rated Current Setting DIP S/W:
0.5A~60A

Order type


Mounting type	Model/CT	Operating characteristics	Current setting range	Order type
Tunnel type Screw / rail mounting	GMP60-TD - 2CT type	Defined Time characteristics D-Time : 1~60sec O-Time : 0.5~30sec	0.5 - 60A	GMP60-TD 6/60A
	GMP60-TDa - 2CT type - Low Current Protection - Auto-return	Defined Time characteristics D-Time : 1~60sec O-Time : 0.5~30sec A-Time : 1~20min	0.5 - 60A	GMP60-TDa 6/60A

Technical information


Install	Screw / rail mounting
Tolerance	Current : ±5% Time : ±5% (or ±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Minimum 100MΩ/500VDC
Lightning impulse voltage	1.2×50μs 5kV With standard waveform
Fast Transient Burst	2kV/1min
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	7-Segment, 3-phase current value, trip cause
Application specification	IEC60947-1



GMP60-3T
GMP60-3TR




Terminal Block



If external CT (current transformer) is used, the product is applicable to a large current of 60A or more.

Specification (Tunnel type / Screw type EMPR)

Connection methods	Tunnel type / Screw type
Auxiliary contact	2SPST (1a1b at energization)
Current setting range	0.5~60A
Operating time characteristics	Definite time
Number of built-in CT (deflector)	3
Operating power	AC 100~260V
Return (reset) method/time	Manual/Electrical return
Using Inverter Secondary	Available (Exclude GMP60-3TR)



Definite time

Type		GMP60-3T, 3S	GMP60-3TR, 3SR
Protection	Overcurrent	✓	✓
	Lock/Stall	✓	✓
	Phase failure	✓	✓
	Phase unbalance	✓	✓
	Reverse phase	-	✓
Save the last fault cause		✓	✓

* To use a terminal connection type (Screw Type), please purchase a terminal block separately.

Order type

Mounting type	Model/CT	Operating characteristics	Current setting range	Order type
Tunnel type Screw / rail mounting	GMP60-3T - 3CT type	Defined Time characteristics D-Time : 0.2~60sec O-Time : 0.2~15sec	0.5~60A	GMP60-3T 6/60A
	GMP60-TR - 3CT type - Reverse phase protection	Defined Time characteristics D-Time : 0.2~60sec O-Time : 0.2~15sec	0.5~60A	GMP60-3TR 6/60A
Screw type Screw / rail mounting	GMP60-3S - 3CT type	Defined Time characteristics D-Time : 0.2~60sec O-Time : 0.2~15sec	0.5~60A	Please order a penetration type and a terminal block separately and assemble them before use.
	GMP60-3SR - 3CT type - Reverse phase protection	Defined Time characteristics D-Time : 0.2~60sec O-Time : 0.2~15sec	0.5~60A	

Technical information

Install	Screw / rail mounting
Tolerance	Current : ±5% Time : ±5% (or ±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Minimum 100MΩ/500VDC
Lightning impulse voltage	1.2×50μs 5kV With standard waveform (IEC60255-22-5)
Fast Transient Burst	2kV/1min (IEC61000-4-4)
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	Red / Green 2 colors LED, Red LED
Application specification	IEC60947-1

Rated specifications & order type


GMP60-3TZ/3TZR, 3TN/3TNR, 3SZ/3SZR, 3SN/3SNR



GMP60-3TZ, 3TZR
GMP60-3TN, 3TNR

Specification (Ground fault protection EMPR)

Connection methods	Tunnel type / Screw type
Auxiliary contact	2SPST (1a1b at energization)
Current setting range	0.5~60A
Operating time characteristics	Definite time
Number of built-in CT (deflector)	3
Operating power	AC 100~260V
Return (reset) method/time	Manual/Electrical return
Definite time characteristics	D-Time : 0.2~60sec O-Time : 3sec
Using Inverter Secondary	Available (Exclude GMP60-3TZR, 3TNR) note)



Definite time

Note) If inverter load has an error, turn OFF ground fault function.

Type		GMP60-3TZ, 3TN	GMP60-3TZR, 3TNR
Protection	Overcurrent	✓	✓
	Lock/Stall	✓	✓
	Phase failure	✓	✓
	Phase unbalance	✓	✓
	Ground Fault	✓	✓
	Reverse phase	-	✓
Save the last fault cause		✓	✓

Order type

Mounting type	Model/CT	Operating characteristics	Current setting range	Order type
Tunnel type Screw / rail mounting	Zero phase current detection (0.1~2.5A) (Separate ZCT required)	GMP60-3TZ	0.5 - 60A	GMP60-3TZ 6/60A
		GMP60-3TZR - Reverse phase protection	0.5 - 60A	GMP60-3TZR 6/60A
	Residual current detection (0.5~6A)	GMP60-3TN	0.5 - 60A	GMP60-3TN 6/60A
		GMP60-3TNR - Reverse phase protection	0.5 - 60A	GMP60-3TNR 6/60A
Tunnel type Screw / rail mounting	Zero phase current detection(0.1~2.5A) (Separate ZCT required)	GMP60-3SZ	0.5 - 60A	GMP60-3SZ 6/60A
		GMP60-3SZR - Reverse phase protection	0.5 - 60A	GMP60-3SZR 6/60A
	Residual current detection(0.5~6A)	GMP60-3SN	0.5 - 60A	GMP60-3SN 6/60A
		GMP60-3SNR - Reverse phase protection	0.5 - 60A	GMP60-3SNR 6/60A

Note) 1. In case of terminal connection type, please order a penetration type and a terminal block separately and assemble them before use.
2. In case of ZCT, use ZCT (100mA/40~55mV) for EMPR only.

Technical information

Install	Screw / rail mounting
Tolerance	Current : ±5% Time : ±5% (or ±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Minimum 100MΩ/500VDC
Lightning impulse voltage	1.2×50μs 5kV With standard waveform (IEC60255-22-5)
Fast Transient Burst	2kV/1min (IEC61000-4-4)
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	Red / Green 2 colors LED, Red LED
Application specification	IEC 61000, IEC60947-1


GMP80



GMP80

Specification

Connection methods	Screw type (No direct connection with Metasol MC)
Auxiliary contact	2SPST (1a1b at energization)
Current setting range	16~80A
Operating time characteristics	Inverse-time
Number of built-in CT (deflector)	2 (R, T type) or 3
Operating power	AC 100~260V
Return (reset) method/time	Manual/Electrical return (Standard) Manual/Auto/Electrical return (GMP80-2SA)
Using Inverter Secondary	Available (Exclude GMP80-3SR)



Inverse-time

Model numbering		GMP80-2S	GMP80-2SA	GMP80-3S	GMP80-3SR
Functions	Overcurrent	✓	✓	✓	✓
	Locked rotor	✓	✓	✓	✓
	Phase loss	✓ note)	✓ note)	✓	✓
	Phase unbalance	-	-	✓	✓
	Reverse phase	-	-	-	✓
Certification	UL, CE	✓	-	✓	✓

Note) The product detects phase failure of the phase (R, T) connected with two CTs in order for protection.



Order type

Mount/Connection	Model numbering system / CT	Setting range	Catalog No.
Screw type Screw / rail mounting	GMP80-2S - 2CT	16 - 80A	GMP80-2S 80A
	GMP80-2SA - 2CT - Automatic return	16 - 80A	GMP80-2SA 80A
	GMP80-3S - 3CT	16 - 80A	GMP80-3S 80A
	GMP80-3SR - 3CT - Reverse phase protection	16 - 80A	GMP80-3SR 80A

Rated specifications


Tolerance	Current : ±5% Time : ±5% (or ±0.5sec)
Frequency	50/60Hz
Aux. contact Ratings	5A/250VAC Resistive load
Insulation resistance	Min 100MΩ at 500V DC
Lightning impulse voltage	1.2×50μs 5kV With standard waveform (IEC60255-22-5)
Fast Transient Burst	2kV/1min (IEC61000-4-4)
Environment	Operation : -25~70°C Storage : -30~80°C Relative humidity : within 80% RH, no condensation
Trip indicator	Red LED (2CT : 1, 3CT : 2)
Application specification	UL508, IEC60947-1



Revolutionary development of motor protection relays

Complete motor protection is realized with real time data processing and high precision.



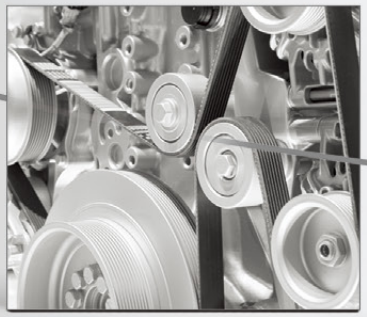







DMPi Series

Intelligent Digital Motor Protection Relays

- Definite/Inverse time option and various protection methods
- Storage of failure causes
- Separated display part using cables
- MODBUS communication, 4~20mA DC output
- Operating time displayed for each model

Contents

36 A list of standard models
37 Product characteristics
41 Rated specifications & model numbering system
42 Operation & setting method
51 Terminal configuration / Wiring & cable connection
57 Dimensions




Rated specifications & model numbering system

Rated specifications

Connection method		Penetrated / Terminal type
Protection functions		Overcurrent, phase fail, phase unbalance, stall, locked rotor,reverse phase, ground fault (Type option)Instance (Type option)
Connection method		Penetrated / Terminaltype
Operating time characteristics		Thermal heat build-up inverse time / Non-thermal heat build-up inverse time / Definite time
Rated current		0.5~6A/5~65A(Rating option upon placing an order)
Display		4 digit, 7-Segment
Operating power		AC/DC 85~260V(50Hz/60Hz)
Reset method	Automatic	1~20min (only for overcurrent)
	Manual	(Electrical reset)
Installation / Mounting method		Display can be installed separately, 35mm DIN rail / Screw installation
Tolerance	Current	±3%
	Time	±5%
	4~20mA output	±5%
Time setting	Startup delay	1~200sec
	Operation delay	1~60sec
Aux. contact	Composition	3-SPST(Power supply 1a1b, i nstantaneous operation 1a) Note1)
	Capacity	3A/250VAC Resistive Load
	Contact minimum load	100mA / 6VDC : (95-996, 97-98)
		10mA / 5VDC (07-08)
ZCT Input	External	200mA/100mV(Exclusive ZCT) Note2)
	Built-in	Support (Separate connection unnecessary Note2)
Service environment	Service temperature	-20°C ~ 60°C
	Storage temperature	-30°C ~ 70°C
	Relative humidity	within 80% RH, no condensation
Insulation resistance		100MΩ/500VDC
Lightning impulse voltage		1.2X50us 5kV Prototype waveform supply
Fast transient		2kV/1Min
Power consumption		Below 2W

Note 1. See No. 21 to 23 of A-Group in Setting menu If single phase is set, the device measures R/S/T phase. In HMI, the maximum phase of three phases is displayed without any indication of phase.
2. It is used when zero current detection type is selected.
3. This product is used to protect a low-voltage motor with 1000V or less

Model numbering system

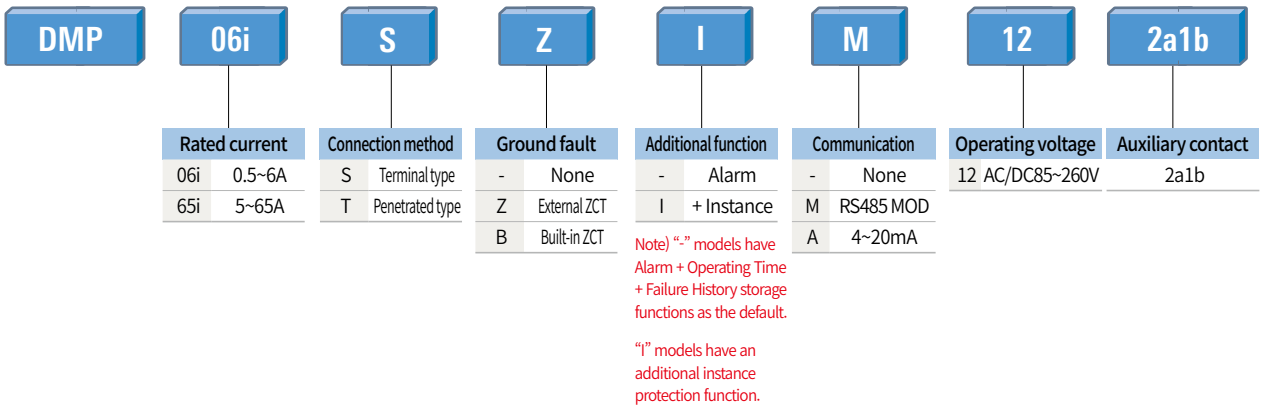



Perfect Selection of Motor Protection & Monitoring Device!

With the compact system structure and advanced protection functions, the device provides new standards of next-generation motor protection relay.



IMP Series

Intelligent Motor Protection Relays

- Ground fault protection for both zero current/residual current
- Support rated current 0.12~100A without external current transformer
- Definite/inverse time selection and diverse protection factors
- Basic application of ground fault/instance protection
- Separation of the display part with the use of Cable
- MODBUS communication and 4~20mA DC output

Contents

62 Product characteristics
64 Rated specifications & model numbering system
65 Operation & setting method
69 Terminal configuration / Wiring & cable connection
70 Dimensions

Rated specifications & model numbering system



Integral type



Extention type

Rated specifications

Protection		Over current, Lock/Stall, Phase failure, Phase unbalance, Reverse phase, Under current, Ground fault, Short circuit
Connection method		Extention type
Operating Time Characteristics		Heat accumulation inverse time / inverse time / definite time
Rated current		0.5~10A/5~100A (Separate)
Display		4digit, 7-Segment
Operating power		AC/DC 85~245V (50Hz/60Hz)
Return method	Auto	1~20min
	Manual / Electrical	On/Off Selectable
Installation / installation method		Display can be installed separately, 35mm DIN rail / Screw installation
Tolerance	Current	±5%
	Time	±5%
	4~20mA Output	±5%
Time setting	Startup delay	1~200sec
	Operation delay	1~60sec
Aux. contact	Configuration	3-SPST(Power supply 1a1b, instantaneous operation 1a) Note1)
	Capacity	3A/250VAC Resistive Load
	Contact minimum load	10mA / 5VDC
ZCT Input		200mA/100mV (Exclusive ZCT) Note2)
Environment	Operation	-10~55°C
	Storage	-20~70°C
	Relative humidity	within 80% RH, no condensation
Insulation Resistance		100Mohm/500VDC
Power consumption		1.2X50us 5kV Prototype waveform supply
Fast Transient		2kV/1Min
Power consumption		Below 3W

Note) 1. See No. 17-19 of A-Group in Setting menu.
2. It is used if zero current detection type is selected.
3. This product is designed for protecting a low-voltage motor with 1,000V or less. Therefore, it should not be used in high voltage lines.

Model numbering system

IMP — C — A420 — 10A — 110/220

Factors Protected	
C	Current

Communication	
NO	None
A420	4~20mA Output
M485	Modbus/RS-485

Current adjustment range	
10	0.5~10A
100	5~100A

Control Voltage	
110/220	AC/DC85~245V
24/36	AC/DC24~36V

Innovative Upgrade of Motor Control Panel!

More compact and Safer! We implement perfect motor protection.



- Power, Voltage, Current (measurement error: 1%)
- Power, Voltage, Current, Power Factor Protection
- Harmonic measurement (1st to 16th)
- Diverse motor starting types
  (Full voltage, Y-D, Reversible, Reactor, Inverter Starting)
- Modbus communication and 4~20mA

One model with various motor starting types

One S-EMPR model is applicable to various motor staring types, such as full voltage starting, Y-△ starting, reversible staring, Reactor starting, and Inverter starting.

A variety of SCADA functions based on sequence structure

With a simple sequence, it is possible to not only control local operation panel (LOP) and MCC panel, but conduct Supervisory Control And Data Acquisition through SPLC or DCS based auto operation and communication.




MMP Series

Smart Electronic Motor Protection Relays

- Current, Voltage, Power Measurement and Power Factor Protection
- Instantaneous interruption compensation and restarting
- Harmonic measurement (1st to 16th)
- Modbus communication and 4~20mA

Contents

74 Product characteristics
83 Rated specifications & model numbering system
84 Operation & setting method
96 Terminal configuration / Wiring & cable connection
103 Dimensions

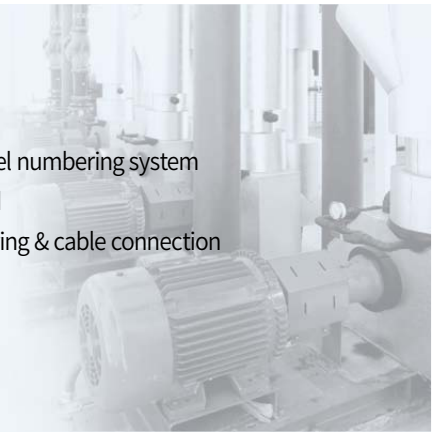

Rated specifications & model numbering system

Rated specifications

Connection		Tunnel type (Passing through CT holes)
Operation characteristic		Thermal-inverse / Inverse / Definite
Rated current		0.5~10A/5~100A (Select Rated on Order)
Display screen		4 digit, 7-Segment, LED
Control Power		110Vac or 220Vac 50/60Hz
Reset	Auto	1-20 minutes
	Manual	ON / OFF selectable
Mounting		Display unit : sepatately mountable
Accuracy		Current and voltage metering : ± 1% of rating or ± 2% of minimum rating
		4~20mA output : ± 5%
Time delay	Start	1-200 seconds
	Operation	1-60 seconds
Auxiliary contacts		6 contacts (3A / 250VAC at resistive load, power type based)
	Contact minimum load	10mA / 5VDC
ZCT input		Basic installation of built-in ZCT External ZCT (200mA/1.5mA, universal ZCT connectable)
I/O assured voltage	110V Type	63V ±10%
	220V Type	140V ±10%
Environment	Operation Temp.	-10~55°C
	Storage Temp.	-20~70°C
	Humidity	within 80% RH, no condensation
Insulation resistance		100MΩ/500VDC
Lightning impulse voltage		1.2 × 50μs 5kV standard waveform applied
Fast Transient		2kV/1Min
Power consumption		5W or under

Model numbering system

